

100%
Recycled
Nylon

Urban Retreat 501

Interface®



327500 Gold




327501 Moss




327502 Bark



327503 Straw

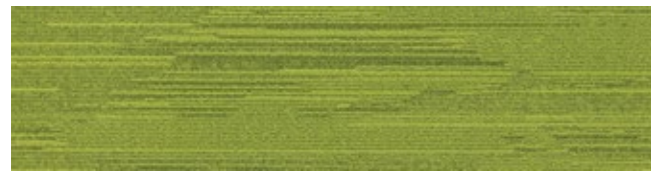

327504 Grass

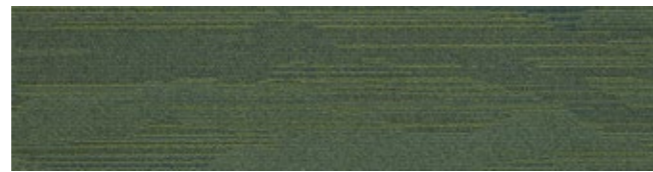

327505 Ivy



327506 Flax



327507 Sage




327508 Blue



327509 Navy



327510 Ash

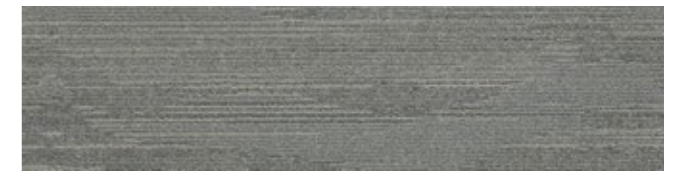


327511 Stone




327512 Orange



327513 Red

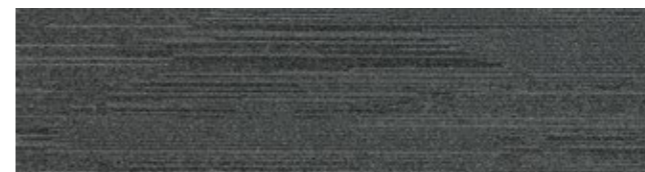

327514 Granite

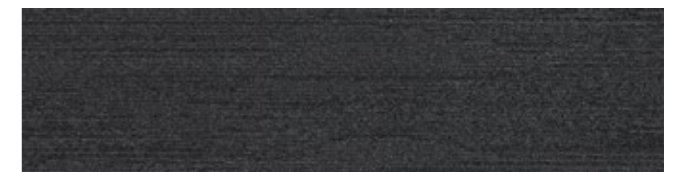

327515 Charcoal



327507 Sage, 327510 Ash, 327506 Flax, 327508 Blue, 327504 Grass

Installed: Ashlar





327501 Moss, 327506 Flax, 327507 Sage
& Urban Retreat 103 327122 Moss

Installed: Design by Tile



327514 Granite

Installed: Herringbone

Product Definition	Tufted Patterned Structured Tip Sheared Tile
Konstruktion	Tuftgemusterte strukturierte Tip-Sheared - Schlingenqualität
Descripción	Moqueta modular tufting bucle estructurado y pelo cortado con diseño
Description	Dalle de moquette à velours tufté structuré, bouclé et rasé à motifs
Type	Getufte gestructureerde tip sheared bouclé
Descrizione	Bouclé tufted strutturato rasato

Pile Material	100% Recycled BCF Solution Dyed Nylon contains pre and post consumer recycled content
Polfasermaterial	100% recycled Polyamid, enthält Anteile pre- und postconsumer recycelten Materials
Composición Fibra	100% Poliamida reciclada BCF tintada en masa con contenido reciclado pre y post consumo
Composition	Fibre polyamide BCF 100% recyclée teint en masse, contenant des éléments recyclés pré et post consommation
Poolmateriaal	100% gerecycled Solution Dyed Polyamide BCF, bevat 100% pre- en post-consumer gerecycled content
Fibra	100% Poliammide BCF riciclata tinta in massa con contenuto riciclato pre- e post -consumer

Pile Yarn Weight / Poleinsatzgewicht / Peso Fibra / Poids de fibre / Poolinzetgewicht / Peso Felpa	861g/m ² ± 5%
Total Weight / Gesamtgewicht / Peso Total Poids total / Totaalgewicht / Peso Totale	4734g/m ² ± 5%
Pile Height / Polschichtdicke / Altura Fibra / Hauteur de la fibre / Poolhoogte / Altezza Felpa	4,6 mm ± 0,3 mm
Total Thickness / Gesamtdicke / Espesor Total / Epaisseur totale / Totale dikte / Altezza Totale	8,6 mm ± 0,5 mm
Gauge/Ends 10 cm / Teilung x 10 cm / Galga x 10 cm / Jauge-Rangs par 10 cm / Rijen per 10 cm / Serraggio x 10 cm	1/10 – 39,4
Tufts per m² / Noppenzahl/m ² / Puntadas m ² / Densité du tuft par m ² / Aantal noppen per m ² / Densità Punti	169,420 ± 5%
Backing Type / Rückenkonstruktion / Soporte / Sous-couche / Ruguitvoering / Sottofondo	Graphlex®
Wear Classification / Beanspruchungsklasse / Clasificación al tráfico / Classement Gebruiksintensiteit / Resistenza all'usura	Heavy Contract (EN 1307) Class 33 / LC2

Style	32750
3m ² - 12 tiles per box (25 x 100 cm ± 0,2%)	

Radiant Panel / Schwerentflammbarkeit	(EN ISO 9239/1) Euroclass Cfl s1 (EN ISO 13501)
Hot Metal Nut	Pass, low radius of effects of ignition (BS 4790)
Dimensional Stability / Dimensionsstabilität Estabilidad Dimensional / Stabilité dimensionnelle Dimensionele stabiliteit / Test Stabilità dimensionale	≤ 0,2% (EN 986)

Sound Absorption					
125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
0.00	0.06	0.12	0.29	0.38	0.51

EN 14041
CE
DOP: 1037/120295
textile floor covering
EN 1307

68703D29

Herringbone Ashlar

27dB ≥ 2,4 ≥ 7 0,20

Cfl-s1 DS <10% 33

Light Value

Product	Colour No	Colour Name	L Value*	Y Value*
Urban Retreat 501	327500	Gold	55.38	23.3
	327501	Moss	48.88	17.49
	327502	Bark	24.68	4.31
	327503	Straw	49.01	17.61
	327504	Grass	45.37	14.81
	327505	Ivy	30.31	6.36
	327506	Flax	50.12	18.52
	327507	Sage	41.87	12.41
	327508	Blue	32.35	7.24
	327509	Navy	23.98	4.09
	327510	Ash	48.37	17.09
	327511	Stone	38.87	10.58
	327512	Orange	45	14.54
	327513	Red	31.59	6.9
	327514	Granite	31.01	6.66
327515	Charcoal	22.48	3.65	

* **Light Value:** L Value = L according to CIE L*a*b* colour space, Y Value = Light Reflectance Value according to BS 8493
Lichtreflexionswerte: L-Wert = L gemäß CIE L*a*b* Farbspektrum, Y-Wert = Lichtreflexionswert gemäß British Standard BS 8493

Valores de Reflectancia de Luz: Valor L = L según CIE L*a*b* espacio de color, Valor Y = Valor de reflectancia de luz según el estándar británico BS 8493

Valeurs concernant la lumière: Valeur L = L faisant référence à la méthode CIE L*a*b* pour la couleur, Valeur Y = Valeurs de réflectance de la lumière selon le British Standard BS 8493

Licht waarden: L Waarde = L volgens CIE L*a*b*kleurruimte, Y Waarde = Licht Reflectie Waarde volgens BS 8493
Indici di riflettanza alla luce: Indice L = L secondo CIE L*a*b* colour space, Indice Y = Indice di riflettanza alla luce secondo la norma BS 8493

Environmental Data Sheet

Construction			
Yarn system	100% BCF Solution Dyed PA 6		
Backing system	Graphlex®		
Recycled Content	Total Recycled Content	Pre consumer	Post recycled
Product average	62,96%	53,97%	8,99%
Yarn average	100%	50%	50%
Recycled content can be subject to differences between colours. See details for individual colours on next page.			
Carbon Footprint			
Global Warming Potential (kgs CO2 equivalents/sq meter)			
Full life-cycle carbon footprint (following our EPD results or EPD calculation method)	Raw materials and Production:	8.47 kg CO ₂ eq./m ²	
	Delivery and installation:	0.72 kg CO ₂ eq./m ²	
	Use (10 years):	2.92 kg CO ₂ eq./m ²	
	End of life (waste to energy):	8.76 kg CO ₂ eq./m ²	
	TOTAL (10 years' lifetime):	20.87 kg CO ₂ eq./m ²	
CO ₂ compensation	Carbon neutral Cool Carpet® is standard		
Manufacturing			
Location	Scherpenzeel, NL Factory is certified ISO 14001 since 1996 and ISO 9001 since 1990		
Installation Impacts			
TacTiles™	Optimised for glue-free installation with TacTiles™ connectors with virtually zero VOCs		
Installation Waste	In a typical installation* using the installation method below:		
	Ashlar -3-5% installation waste		
	Herringbone - 3-5% installation		
	For reference: 2 metre wide broadloom typically generates 7-10 % installation waste		
* In a rectangular building, installed before walls.			
End-of-life			
Alternatives to landfill	Reuse: Can be cleaned and reused in a non-critical location to extend its useful life		
	Recycling: Can be returned through the Interface ReEntry scheme and be re-used as raw material in new carpet tiles		
	Waste-to-Energy: Can be incinerated in appropriate waste to energy plant		
Indoor Air Quality			
GUT (Gemeinschaft umweltfreundlicher Teppichboden)	The product passes all requirements of GUT's testing criteria regarding hazardous substances, emissions and odour. GUT PRODIS Certificate no. 697D3D29		
CRI (Carpet & Rug Institute)	Compliant to LEED IQ 4.3 credit (tested in Eurofins to the equivalent test of the CRI Green Label Plus)		
Compliance to Green Building Schemes			
See next page to check how our products contribute to the main green building certification schemes (BREEAM, LEED, HQE and DGNB)			
Type III Environmental Product Declaration			
EPD according to ISO 14025	This product has a type III generic Environmental Product Declaration, EPD-IFF-20120021-CBD1-EN		

Recycled content – colour level						
Colourway	Total recycled content	Pre consumer recycled content	Post consumer recycled content	Total yarn recycled content	Yarn Pre consumer recycled content	Yarn Post consumer recycled content
327500 Gold	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327501 Moss	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327502 Bark	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327503 Straw	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327504 Grass	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327505 Ivy	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327506 Flax	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327507 Sage	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327508 Blue	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327509 Navy	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327510 Ash	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327511 Stone	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327512 Orange	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327513 Red	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327514 Granite	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%
327515 Charcoal	62,96%	53,97%	8,99%	100,00%	50,00%	50,00%

Compliance to Green Building Schemes	
BREEAM (UK and international)	<p>BRE Green Guide Ratings:</p> <ul style="list-style-type: none"> Office - Not Available Education - Not Available Health Care - Not Available Retail (by fashion) - Not Available <p>Potential contribution to following categories and credits:</p> <ul style="list-style-type: none"> Hea 02 - Indoor air quality – minimising sources of air pollution Hea 05 - Acoustic Performance Mat 01 - Life Cycle Impacts Mat 05 - Designing for robustness Wst 01 - Construction Waste Management
LEED 2009 US	<p>Potential direct or indirect contribution to following categories and credits:</p> <ul style="list-style-type: none"> Indoor Environmental Quality Credit 4.1 Low Emitting Materials: Adhesive & Sealants Credit 4.3 Low Emitting Materials: Carpet Systems Materials and Resources Credit 2.1 Construction Waste Management Credit 4.1 Recycled content Credit 5.1 Regional Materials Innovation and Design Credits 1-4 1 Pilot Credit 43, Certified Products
HQE (FR)	<p>Potential direct or indirect contribution to several points within following targets:</p> <ul style="list-style-type: none"> 2. Integrated choice of products and construction materials 3. Low site nuisance 9. Acoustic comfort 10. Visual comfort 11. No unpleasant smells 12. Sanitary quality of areas 13. Sanitary air quality
DGNB (D)	<p>Potential direct or indirect contribution to following criterion</p> <p>ENVIRONMENTAL QUALITY</p> <ul style="list-style-type: none"> ENV1.2 Local Environmental Impact <p>ECONOMIC QUALITY</p> <ul style="list-style-type: none"> ECO1.1 Building-Related Lifecycle Costs ECO2.1 Efficient Use of Space <p>SOCIOCULTURAL AND FUNCTIONAL QUALITY</p> <ul style="list-style-type: none"> SOC1.2 Indoor Air Quality SOC1.3 Acoustic Comfort <p>TECHNICAL QUALITY</p> <ul style="list-style-type: none"> TEC1.5 Ease of Cleaning and Maintenance TEC1.6 Ease of Dismantling and Recycling

THIS DATA CAN BE USED TO COMPARE CARPET PRODUCTS WITHIN THE INTERFACE PORTFOLIO. COMPARISON WITH OTHER PRODUCTS WOULD REQUIRE USE OF SAME METHODOLOGIES. Interface reserves the right to change or modify any information included on the Environmental Data Sheet. Information updated 8th August 2013



TacTiles™

- A smarter, more sustainable way to install carpet tiles
- No need for liquid adhesives
- Fitting tiles is quick, clean and easy and the process virtually eliminates emissions
- No damage to sub floors, and nothing to stop you lifting or moving the carpet whenever you want



Entrance Matting

Incredibly tough, hard-wearing and practical; indoor entrance matting acts as the first line of defence to any interior by removing almost 100% of dirt, rain and mud before it's walked into your flooring.

Both of the products in our commercial entrance matting range – Barricade and Foyer – are resilient, functional, easy to maintain and stylish. And it's for these reasons that our barrier matting forms an essential part of any maintenance programme needed to keep your floorcovering looking its very best.